



## 790-2170/2490-2690 Dual Band Combiner 2in 1out

### ELECTRICAL SPECIFICATIONS

ANT-Port1 Frequency Range (MHz)	790-2170MHz
Insertion Loss (dB)	0.15typical 0.3max
Return Loss(dB)	20 typical 18 min
Isolation(2490-2690MHz)	52 typical 50dB min
Intermodulation	<-160dBc typical ,< -155 dBc min (with 2x43 dBm)
ANT-Port2 Frequency Range (MHz)	2490-2690MHz
Insertion Loss (dB)	0.15typical 0.3max
Return Loss(dB)	20 typical 18 min
Isolation(790-2170MHz)	52 typical 50dB min
Intermodulation	<-160dBc typical ,< -155 dBc min (with 2x43 dBm)
Max Input Power per port	200W
DC Pass Current	3A
Impedance	50 Ω


### MECHANICAL SPECIFICATIONS

Dimension HxWxD mm (body)	Single Unit: 141x115.7x49.5mm (Filter Body)
Weight	Single Unit: ≤1.45kg (Net weight)
Colors	Light Grey
RF Connectors	7/16 DIN-Female or 4.3-10-Female
Mounting Kit	Mounting kit for pole and wall included

### ENVIRONMENTAL SPECIFICATIONS

Temperature Range	-40°C to +65°C
Operational	ETS 300 019-1-4
Transportation	ETS 300 019-1-2
Storage	ETS 300 019-1-1
Lightning Protection	±5KA 8/20us
Housing	Aluminum
Ingress Protection	IP67


### Block Diagram

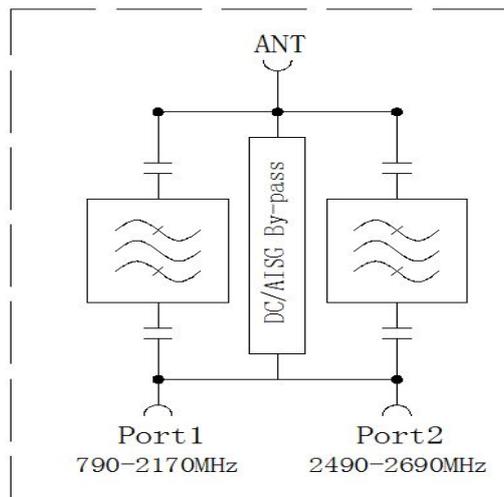



## 790-2170/2490-2690 Dual Band Combiner 2in 1out

### Mechanical Dimension

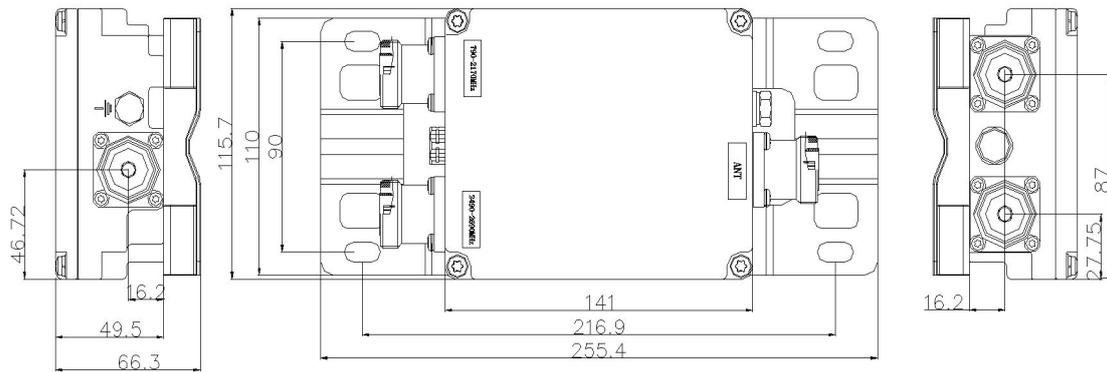

### Ordering Information

Part Number	Product Type	DC Configuration	
		DC pass in LOW band	DC pass in High band
TY-C122S030(F1V1)	Single Unit	✓	✓
TY-C122S030(F1V2)	Single Unit	✓	✗
TY-C122S030(F1V3)	Single Unit	✗	✓
TY-C122S030(F1V4)	Single Unit	✗	✗

### Application

The Combiner TY-C122S030 to be used for combining 790-2170/2490-2690 signals to a common feeder. Rejection between the two systems is provided to suppress wide band noise and spurious signals between the systems. The combiner has a configurable DC path to provide both DC and modulated subcarrier communication to TMA and RET systems over the feeder cable. This unit is intended for indoor or outdoor installations.

TYCC vented enclosure is designed to prevent the effect of condensation thereby guaranteeing long reliable, maintenance free service in all environmental conditions.