


**7/16DIN Male to 4.3-10 Female adapter.**
**Electrical specifications**

Frequency Range	DC to 6 GHz
Impedance	50Ω
Return loss	Max. 1.08 (DC-3GHz) Max. 1.10 (3-6GHz)
Insertion loss	≤0.1 dB
Intermodulation IM3(2x43dBm)	≤-160 dBc
Dielectric with standing voltage	2500 VRMS. MIN.50Hz
Insulation resistance	5000MΩ MIN.

**Mechanical specifications**

Connector specification	IEC 60169-4 / IEC 60169-54
Connector type 1	7/16DIN Male
Connector type 2	4.3-10 Female
Durability	500 Cycles MIN.
Operating temperature	-50 °C to +85 °C
Body material	Brass, Tri-Alloy plating

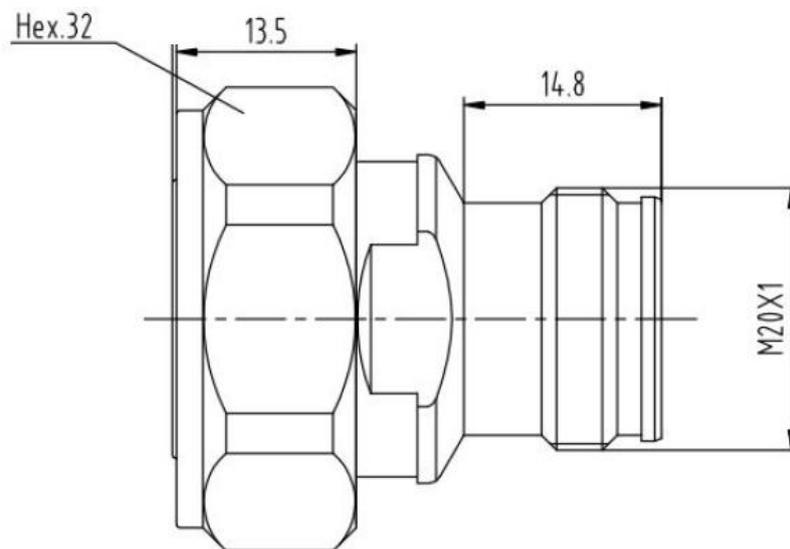

All dimensions are in mm