


N Male to N Male adapter.
Electrical specifications

Frequency Range	DC to 6 GHz
Impedance	50Ω
Return loss	Max. 1.10 (0-3GHz) Max. 1.12 (3-6GHz)
Insertion loss	0.05+0.05*SQRT(f) dB
Intermodulation IM3(2x43dBm)	≤-155 dBc
Dielectric with standing voltage	2500V, AC,1Min
Insulation resistance	≥5000MΩ
Center contact resistance	≤1mΩ (N)
Outer contact resistance	≤0.25mΩ (N)

Mechanical specifications

Connector specification	IEC 61169-4
Connector type 1	N Male
Connector type 2	N Male
Durability	100 Cycles MIN.
Operating temperature	-55 °C to +90 °C
Body material	Brass, alloy plating
Recommended torque	5 Nm

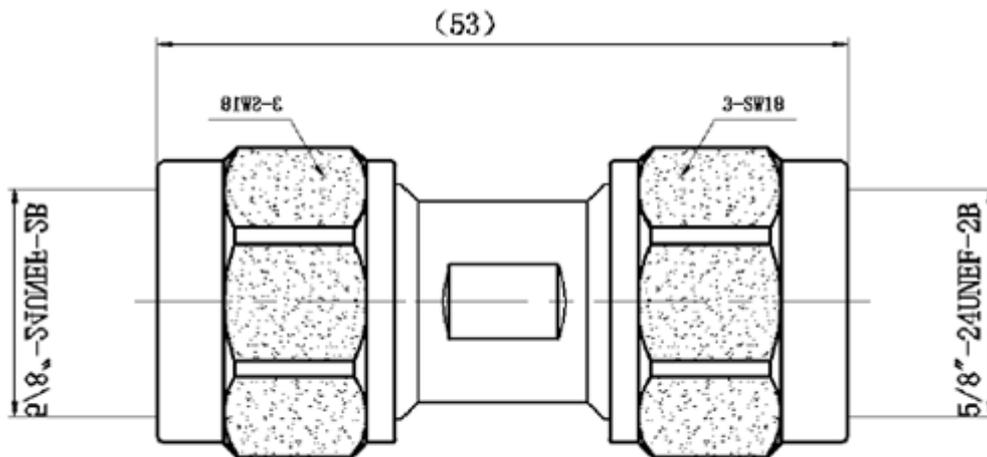

All dimensions are in mm