



790-862/880-960 Dual Band Combiner 2in 1out

ELECTRICAL SPECIFICATIONS

ANT-Port1 Frequency Range (MHz)	790-862MHz
Insertion Loss (dB)	0.3Typical,0.5max
Return Loss	20dB Typical,18dB min
Isolation(880-960MHz)	52dB Typical,50dB min
Intermodulation	<-160dBc Typical, <-155dBc (with 2x43dBm)
ANT-Port2 Frequency Range (MHz)	880-960MHz
Insertion Loss (dB)	0.3Typical,0.5max
Return Loss	20dB Typical,18dB min
Isolation(790-862MHz)	52dB Typical,50dB min
Intermodulation	<-160dBc Typical, <-155dBc (with 2x43dBm)
Average power	200W
DC Pass Current	3A
Impedance	50 Ω


MECHANICAL SPECIFICATIONS

Dimension HxWxD mm (body)	Single Unit: 137x134x67mm (filter body)
Weight	Single Unit: ≤2.3kg (net weight)
Colors	Light grey
RF Connectors	7/16 DIN-Female or 4.3-10-Female
Mounting Kit	Mounting kit for pole and wall included

ENVIRONMENTAL SPECIFICATIONS

Temperature Range	-40°C to +65°C
Operational	ETS 300 019-1-4
Transportation	ETS 300 019-1-2
Storage	ETS 300 019-1-1
Lightning Protection	±5KA 8/20us
Housing	Aluminum
Ingress Protection	IP67

Block Diagram.

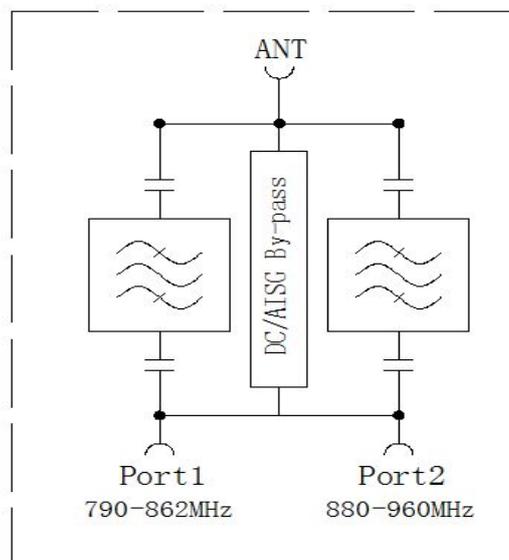


Tongyu Communication Inc.

No. 1, Dongzhendong 2nd RD, Torch Hi-Tech Development Zone, Zhongshan, Guangdong, China
Tel: +86 (0)760 85318111 Fax: +86 (0)760 85594662 Website: www.tycc.cn email: sales@tycc.cn



Mechanical Dimension

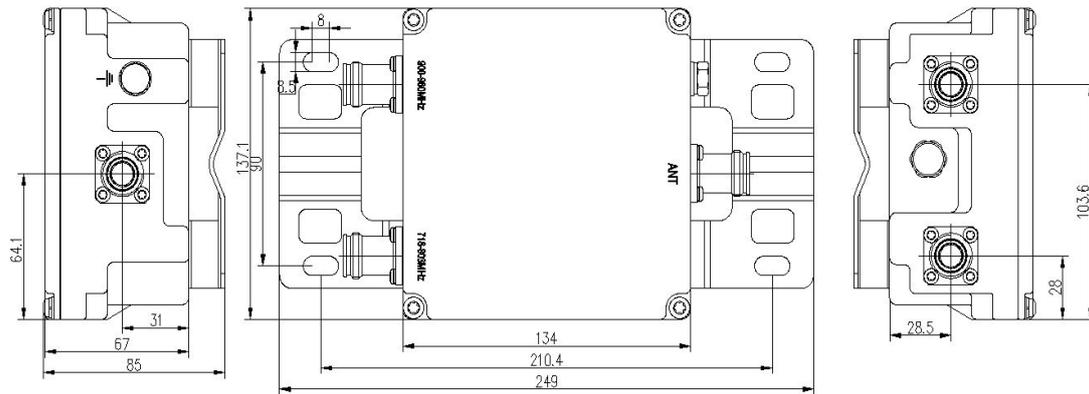

Ordering Information

Part Number	Product Type	DC Configuration	
		DC pass in 800 band	DC pass in 900 band
TY-C002S131 (F1V1)	Single Unit	✓	✓
TY-C002S131 (F1V2)	Single Unit	✓	✗
TY-C002S131 (F1V3)	Single Unit	✗	✓
TY-C002S131 (F1V4)	Single Unit	✗	✗

Application

The Combiner TY-C002S131 to be used for combining 800/900 signals to a common feeder. Rejection between the two systems is provided to suppress wide band noise and spurious signals between the systems. The combiner has a configurable DC path to provide both DC and modulated subcarrier communication to TMA and RET systems over the feeder cable. This unit is intended for indoor or outdoor installations.

TYCC vented enclosure is designed to prevent the effect of condensation thereby guaranteeing long reliable, maintenance free service in all environmental conditions.