


1/2" Ultra soft jumper cable 7/16DIN connector male to 4.3-10 Male, with waterproof rubber boots.

Electrical specifications

Frequency Range	DC to 3GHz
VSWR	$\leq 1.15(\text{DC} \sim 3\text{GHz})$
Impedance	50 Ω
Insertion loss	$\leq L_m \times 0.23 + 0.2 \text{ dB}$
Dielectric Strength	2500 V AC, 1Min
Insulation resistance	$\geq 5000 \text{ M}\Omega$
Center contact resistance	7/16DIN: $\leq 0.4 \text{ m}\Omega$, 4.3-10: $\leq 1.0 \text{ m}\Omega$
Outer contact resistance	7/16DIN: $\leq 0.2 \text{ m}\Omega$, 4.3-10: $\leq 1.0 \text{ m}\Omega$
Intermodulation IM3(2x43dbm)	$\leq -155 \text{ dBc}$

Mechanical specifications

Connector specification	IEC 61169-54 , IEC 60169-4
Length	Lm
Connector type 1	7/16DIN Male
Connector type 2	4.3-10 Male
Cable type	1/2" Ultra soft
Cable outer jacket	Black PE
Minimum bending radius	50mm (Single) / 125mm(Repeated)
Max. tensile strength	750N
Operating temperature	-45 °C to +85 °C
Salt mist	96h (IEC 60068-2-11)
Humidity	$\leq 95\%$
IP grade	IP67

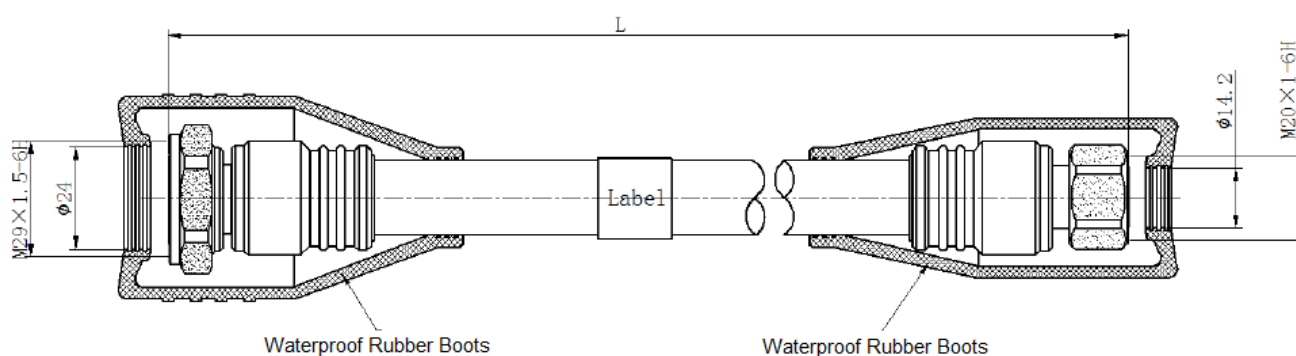

All dimensions are in mm