


1/4" Ultra soft jumper cable, with 4.3-10 connector male to 4.3-10 Male.

Electrical specifications

Frequency Range	DC to 3 GHz
VSWR	≤ 1.18 (DC~3GHz)
Impedance	50 Ω
Insertion loss	$\leq 0.45 \cdot L + 0.3$ dB (@3.0G)
Dielectric Strength	1000 V rms
Insulation resistance	≥ 5000 M Ω
Center contact resistance	≤ 1.0 m Ω
Outer contact resistance	≤ 1.0 m Ω
Intermodulation IM3(2x43dbm)	≤ -155 dBc

Mechanical specifications

Connector specification	IEC 61169-54
Length	10m
Connector type 1	4.3-10 Male
Connector type 2	4.3-10 Male
Cable type	1/4" Ultra soft
Cable outer jacket	Black PE
Minimum bending radius	40mm (Single)
Max. tensile strength	350N
Operating temperature	-45 °C to +85 °C
Salt mist	96h (IEC 60068-2-11)
Humidity	$\leq 95\%$
IP grade	IP67

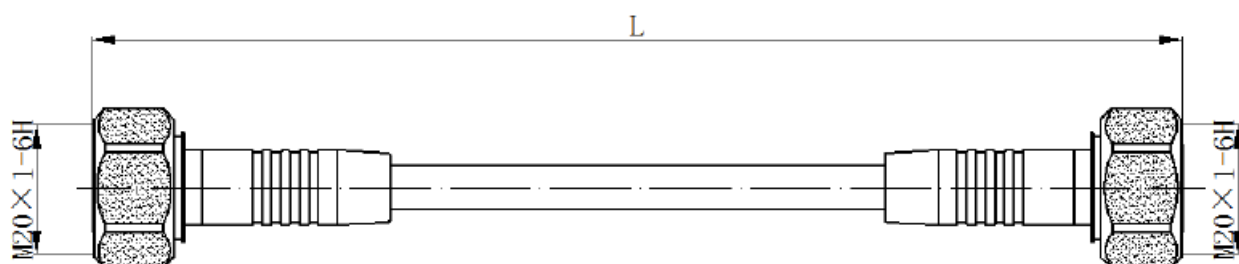

All dimensions are in mm