


1/2" Ultra soft jumper cable, with 4.3-10 connector male to 4.3-10 Female.

Electrical specifications

Frequency Range	DC to 6 GHz
VSWR	≤ 1.15 (DC~3GHz)
Impedance	50 Ω
Insertion loss	≤ 0.93 dB
Dielectric Strength	2500 V rms
Insulation resistance	≥ 5000 M Ω
Center contact resistance	≤ 1.5 m Ω
Outer contact resistance	≤ 0.2 m Ω
Intermodulation IM3(2x43dbm)	≤ -158 dBc

Mechanical specifications

Connector specification	IEC 61169-54
Length	5m
Connector type 1	4.3-10 Male
Connector type 2	4.3-10 Female
Cable type	1/2" Ultra soft
Cable outer jacket	Black PE
Minimum bending radius	17mm (Single)
Max. tensile strength	750N
Operating temperature	-45 °C to +85 °C
Salt mist	96h (IEC 60068-2-11)
Humidity	$\leq 95\%$

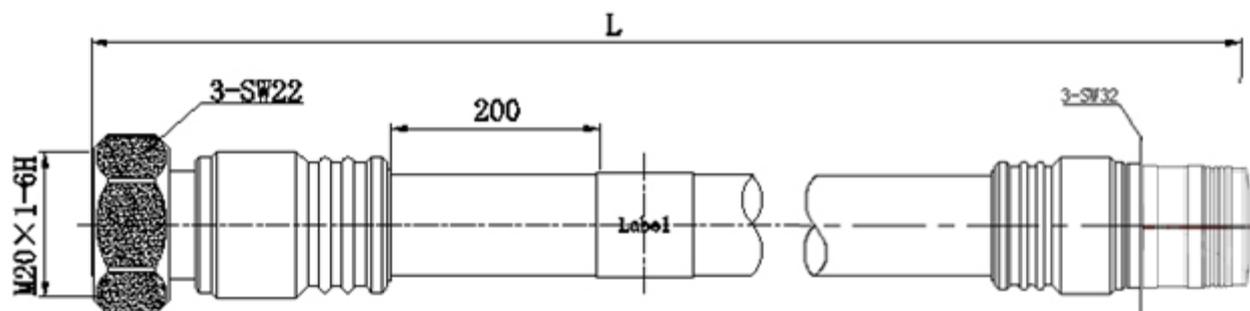

All dimensions are in mm